

Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE18-8AF1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Figure similar



Rated data

Input

Number of phases	3 AC
Line voltage	380 ... 480 V +10 % -20 %
Line frequency	47 ... 63 Hz
Rated current (LO)	11.40 A
Rated current (HO)	10.60 A

Output

Number of phases	3 AC	
Rated voltage	400V IEC	480V NEC ¹⁾
Rated power (LO)	4.00 kW	5.00 hp
Rated power (HO)	3.00 kW	4.00 hp
Rated current (LO)	8.80 A	
Rated current (HO)	7.30 A	
Rated current (IN)	9.00 A	
Max. output current	14.60 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 240 Hz	
Output frequency for V/f control	0 ... 550 Hz	

Overload capability

Low Overload (LO)
150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time
High Overload (HO)
200% base load current IH for 3 s, followed by 150% base load current IH for 57 s in a 300 s cycle time

General tech. specifications

Power factor λ	0.70 ... 0.85
Offset factor $\cos \varphi$	0.95
Efficiency η	0.97
Sound pressure level (1m)	52 dB
Power loss	124.0 W
Filter class (integrated)	Class A

Communication

Communication	PROFINET, EtherNet/IP
---------------	-----------------------

Inputs / outputs

Standard digital inputs

Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

Fail-safe digital inputs

Number	1
--------	---

Digital outputs

Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 0.5 A
Number as transistor	1
Output (resistive load)	DC 30 V, 0.5 A

Analog / digital inputs

Number	1 (Differential input)
Resolution	10 bit

Switching threshold as digital input

0→1	4 V
1→0	1.6 V

Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy $\pm 5^\circ\text{C}$

Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE18-8AF1

Ambient conditions	
Cooling	Air cooling using an integrated fan
Cooling air requirement	0.005 m³/s (0.177 ft³/s)
Installation altitude	1,000 m (3,280.84 ft)

Ambient temperature

Operation	-10 ... 40 °C (14 ... 104 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)

Relative humidity

Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
----------------	--

Connections	
-------------	--

Signal cable

Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)
-------------------------	--

Line side

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)

Motor end

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)

DC link (for braking resistor)

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)
Line length, max.	15 m (49.21 ft)
PE connection	On housing with M4 screw

Max. motor cable length

Shielded	50 m (164.04 ft)
Unshielded	100 m (328.08 ft)

Mechanical data	
-----------------	--

Degree of protection	IP20 / UL open type
Frame size	FSA
Net weight	1.70 kg (3.75 lb)

Dimensions


Width	73 mm (2.87 in)
Height	196 mm (7.72 in)
Depth	200 mm (8.19 in)

Standards	
-----------	--

Compliance with standards	CE, cUL, UL, KC, EAC, C-Tick (RCM)
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Converter losses to IEC61800-9-2*	
-----------------------------------	--

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	33.8 %

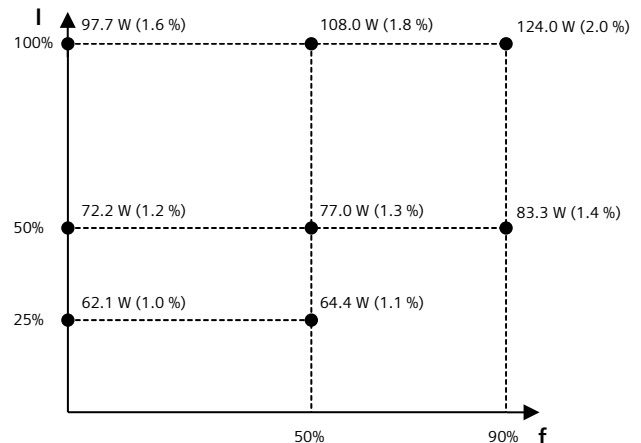

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V

TURLL

YOUR GLOBAL AUTOMATION PARTNER

6SL3210-1KE18-8AF1

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

CHECK STOCK & PRICE



Need Assistance? Scan to Chat on WhatsApp

sales@turll.com | +852 6339 7344