

3-phase busbar with infeed right for 2 circuit breakers Size S00 and S0

product brand name	SIRIUS
product category	Infeed systems
product designation	3-phase busbar
design of the product	for 2 switches with infeed on the right
product type designation	3RV29
suitability for use	circuit-breakers 3RV2
General technical data	
certificate of suitability	CE / UL / CSA / CCC
size of the circuit-breaker	S00, S0
power loss [W] for rated value of the current at AC in hot operating state per pole	4.52 W
type of calculation of power loss depending on pole	quadratic
surge voltage resistance rated value	6 kV
protection class IP on the front according to IEC 60529	IP00
thermal current	63 A
Substance Prohibittance (Date)	10/01/2009
Net Weight	0.425 kg
number of poles for main current circuit	3
operating voltage at AC rated value	500 V
operational current rated value	63 A
UL/CSA ratings	
operating voltage at AC according to UL rated value	600 V
Ambient conditions	
ambient temperature during operation	-20 ... +60 °C
Environmental footprint	
Environmental Product Declaration (EPD)	Yes
global warming potential [CO2 eq] total	70.9 kg
global warming potential [CO2 eq] during manufacturing	2.47 kg
global warming potential [CO2 eq] during operation	68.6 kg
global warming potential [CO2 eq] after end of life	-0.129 kg
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 when using finely stranded conductor cross-section 6 mm ² with end sleeve (with plastic collar) or conductor cross-section ≥ 10 mm ² at the infeed terminal
touch protection on the front according to IEC 60529	finger-safe when using finely stranded conductor cross-section 6 mm ² and end sleeve (with plastic collar) or conductor cross-section ≥ 10 mm ² at the supply terminal
Short-circuit protection	
short-circuit rating	see table in the operating instructions
Installation/ mounting/ dimensions	

mounting position	any
fastening method	snap-on fastening on 35 mm DIN rail
height	129 mm
width	110 mm
depth	87 mm
required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — backwards 0 mm — upwards 10 mm — at the side 0 mm • for grounded parts <ul style="list-style-type: none"> — backwards 0 mm — upwards 10 mm — at the side 0 mm • for live parts <ul style="list-style-type: none"> — backwards 0 mm — upwards 10 mm — at the side 0 mm 	

Connections/ Terminals	
type of electrical connection for main current circuit	spring-loaded terminals

Approvals Certificates

General Product Approval	Test Certificates
   	Type Test Certificates/Test Report Special Test Certificate

Maritime application

					
---	---	---	---	---	---

other **Railway** **Environment**

Miscellaneous		Confirmation		Special Test Certificate	
-------------------------------	---	------------------------------	---	--	---


Environment

[Environmental Confirmations](#)

Further information

- Information on the packaging**
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage**
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)**
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)**
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2917-1E>
- Cax online generator**
<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2917-1E>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<https://support.industry.siemens.com/cs/ww/en/ps/3RV2917-1E>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2917-1E&lang=en

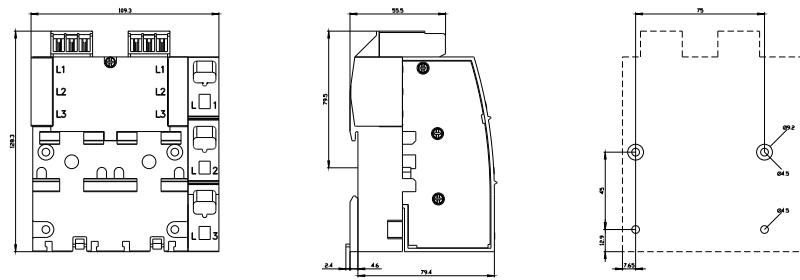

last modified:

6/30/2025 

TURLL

YOUR GLOBAL AUTOMATION PARTNER

3RV2917-1E

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

sales@turl.com | +852 6339 7344