

# SIEMENS











## Data sheet

## 3SU1200-6LB10-1AA0



acoustic signal device, compact, 22 mm, round, plastic, black, continuous tone 4.5 kHz, IP69, sound pressure 75+/-10% dB/10 cm, with holder, operating voltage 24 V AC/DC, screw terminal

product brand name	SIRIUS ACT
product designation	Acoustic signaling device
design of the product	Compact unit
product type designation	3SU1
product line	Plastic, black, 22 mm
manufacturer's article number of the supplied holder	<a href="#">3SU1550-0AA10-0AA0</a>
<b>Enclosure</b>	
number of command points	1
<b>Actuator</b>	
color of the actuating element	black
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	29.5 mm
<b>Front ring</b>	
product component front ring	No
<b>Holder</b>	
material of the holder	Plastic
<b>General technical data</b>	
loudness level at 10 cm distance	75 dB
insulation voltage rated value	320 V
degree of pollution	3
surge voltage resistance rated value	4 kV
consumed current at rated value of operating voltage maximum	28 mA
protection class IP	IP66, IP67, IP69(IP69K)
protection class IP of the terminal	IP20, clamping screw tightened
degree of protection NEMA rating	1
shock resistance	
<ul style="list-style-type: none"> <li>according to IEC 60068-2-27</li> <li>for railway applications according to EN 61373</li> </ul>	sinusoidal half-wave 15g / 11 ms Category 1, Class B
vibration resistance	
<ul style="list-style-type: none"> <li>according to IEC 60068-2-6</li> <li>for railway applications according to EN 61373</li> </ul>	10 ... 500 Hz: 5g Category 1, Class B
reference code according to IEC 81346-2	P
Substance Prohibitance (Date)	10/01/2014
SVHC substance name	Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5
Net Weight	48 g
relative positive tolerance of the operating voltage	20 %
relative negative tolerance of the operating voltage	20 %

Supply voltage		
type of voltage of the supply voltage of the acoustic signal element	AC/DC	
<b>supply voltage at AC</b>		
• at 50 Hz rated value	24 V	
• at 60 Hz rated value	24 V	
<b>supply voltage at DC rated value</b>	24 V	
Control circuit/ Control		
<b>inrush current maximum</b>	2 A	
Connections/ Terminals		
<b>type of electrical connection</b>	screw terminal	
<b>type of connectable conductor cross-sections</b>		
• solid with core end processing	2x (0.5 ... 0.75 mm <sup>2</sup> )	
• solid without core end processing	2x (1.0 ... 1.5 mm <sup>2</sup> )	
• finely stranded with core end processing	2x (0.5 ... 1.5 mm <sup>2</sup> )	
• finely stranded without core end processing	2x (1,0 ... 1,5 mm <sup>2</sup> )	
• for AWG cables	2x (18 ... 14)	
<b>tightening torque of the screws in the bracket</b>	1 ... 1.2 N·m	
tightening torque with screw-type terminals	0.8 ... 1 N·m	
Ambient conditions		
<b>ambient temperature</b>		
• during operation	-25 ... +70 °C	
• during storage	-40 ... +80 °C	
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel)	
Environmental footprint		
Environmental Product Declaration (EPD)	Yes	
global warming potential [CO2 eq] total	0.787 kg	
global warming potential [CO2 eq] during manufacturing	0.566 kg	
global warming potential [CO2 eq] during operation	0.235 kg	
global warming potential [CO2 eq] after end of life	-0.015 kg	
Installation/ mounting/ dimensions		
<b>fastening method</b>	front plate mounting	
<b>height</b>	40 mm	
<b>width</b>	30 mm	
<b>shape of the installation opening</b>	round	
<b>mounting diameter</b>	22.3 mm	
<b>positive tolerance of installation diameter</b>	0.4 mm	
<b>mounting height</b>	11.4 mm	
<b>installation width</b>	29.5 mm	
<b>installation depth</b>	49.6 mm	
Approvals Certificates		
<b>General Product Approval</b>	<b>Test Certificates</b>	<b>Maritime application</b>
   	<a href="#">Type Test Certificates/Test Report</a>	
<b>Maritime application</b>	<b>other</b>	<b>Environment</b>
   	<a href="#">Confirmation</a>	
Environment		



[Environmental Con-  
firmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1200-6LB10-1AA0>

##### Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1200-6LB10-1AA0>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1200-6LB10-1AA0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1200-6LB10-1AA0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1200-6LB10-1AA0&lang=en)

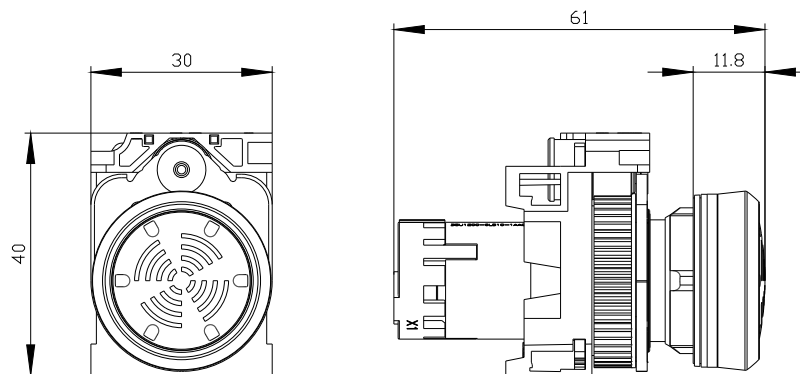

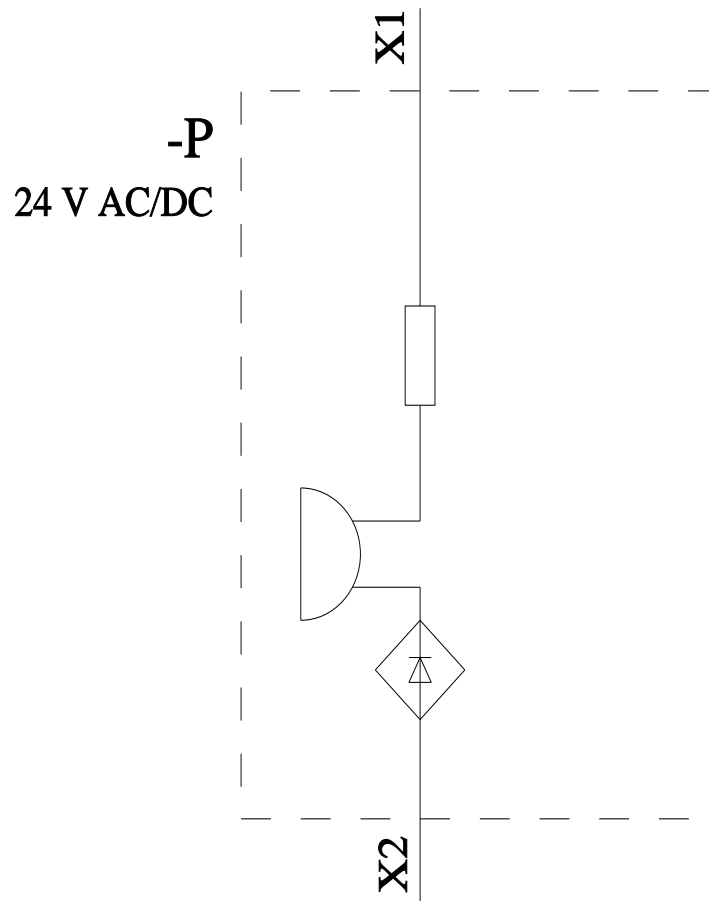

last modified:

4/2/2025 

# TURLL

YOUR GLOBAL AUTOMATION PARTNER

## 3SU1200-6LB10-1AA0

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

[sales@turl.com](mailto:sales@turl.com) | +852 6339 7344