

SIEMENS

Data sheet

5SD440



SILIZED fuse link 500 V for semiconductor protection Quick-acting, Size DII, E27, 25A

Model	
product brand name	SETRON
design of the product	for semiconductor protection
design of the fuse link	SILIZED fuse link, DIAZED design
General technical data	
tripping characteristic class	quick-acting (FE)
size of fuse system according to EN 60269-1	DII
operating class of the fuse link	gR
Supply voltage	
supply voltage	
• at AC	500 V
• at DC	500 V
Protection class	
protection class IP	IP20, with connected conductors
Breaking Capacity	
switching capacity current	
• at AC according to IEC 60947-2 rated value	50 kA
• at DC according to IEC 60947-2 rated value	8 kA
Dissipation	
power loss [W]	12.5 W
power loss [W] for rated value of the current at AC in hot operating state per pole	12.5 W
Appearance	
color coding of the fuse link	others
Product details	
product description	Using screw adapter or adapter sleeves
Mechanical Design	
mounting position	Any, preferably vertical
Net Weight	31 g
Environmental conditions	
ambient temperature during operation	
• minimum	-5 °C
• maximum	40 °C
environmental category	Up to 45°C at 95 % rel. humidity
environmental category during storage	air humidity 90% at 20°C
Approvals Certificates	
General Product Approval	other



EG-Konf.

Confirmation



Confirmation

Environment

[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SD440>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SD440>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD440

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

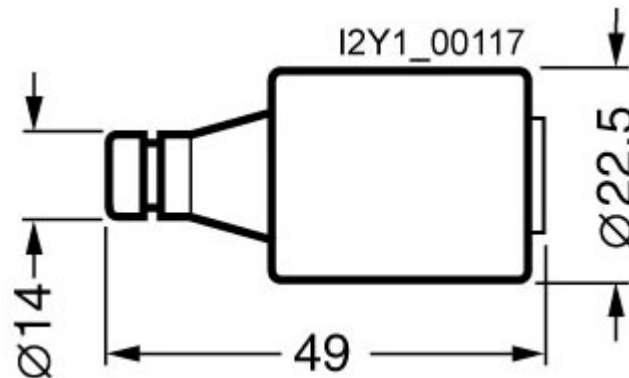

last modified:

4/11/2025

TURLL

YOUR GLOBAL AUTOMATION PARTNER

5SD440

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

sales@turl.com | +852 6339 7344