



Figure similar

shunt release 24-48 V DC, for miniature circuit breaker 5SL4, 5SY, 5SP, RCBO 5SU1, FI 5SV (for 5SU1 handle coupler 5ST3805-1 is required)

Model	
product brand name	SENTRON
product designation	Shunt trip
design of the product	Mountable
design of the product factory mounted	No
electrical endurance (operating cycles) typical	10 000
Current	
operational current at DC rated value	0.05 A
Supply voltage	
operating voltage	
<ul style="list-style-type: none"> rated value at AC rated value minimum at AC rated value maximum at DC rated value minimum at DC rated value maximum 	48 V 24 V 48 V 24 V 48 V
protection class IP	IP20
Control current	
type of voltage of control voltage	AC/DC
Product details	
number of fault signal contacts	0
number of NC contacts	2
number of NO contacts	0
number of CO contacts	0
product extension can be mounted	Universal
product extension	shunt trip
Connections	
connectable conductor cross-section	
<ul style="list-style-type: none"> minimum maximum 	0.5 mm ² 2.5 mm ²
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> minimum maximum 	24 12
tightening torque with screw-type terminals	
<ul style="list-style-type: none"> maximum 	0.8 N·m
Mechanical Design	
height	90 mm
width	18 mm

depth	70 mm
number of modular width units	1
Net Weight	98 g
Environmental conditions	
standard	IEC/EN60947-1
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage minimum	-40 °C
Approvals Certificates	
General Product Approval	other







EG-Konf.

[Confirmation](#)[Miscellaneous](#)[Confirmation](#)

other	Railway	Environment
-------	---------	-------------

[Miscellaneous](#)[Special Test Certificate](#)[Environmental Confirmations](#)[Environmental Confirmations](#)**Further information****Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information for data generation and storage**<https://support.industry.siemens.com/cs/ww/en/view/109995012>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3031>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/5ST3031>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3031**CAX-Online-Generator**<https://www.siemens.com/cax>**Tender specifications**<https://www.siemens.com/specifications>**Characteristic curves**[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

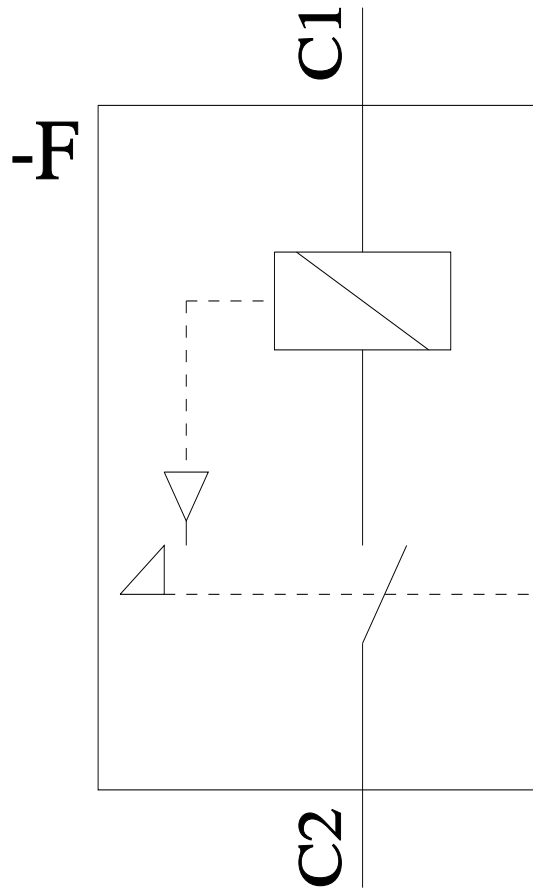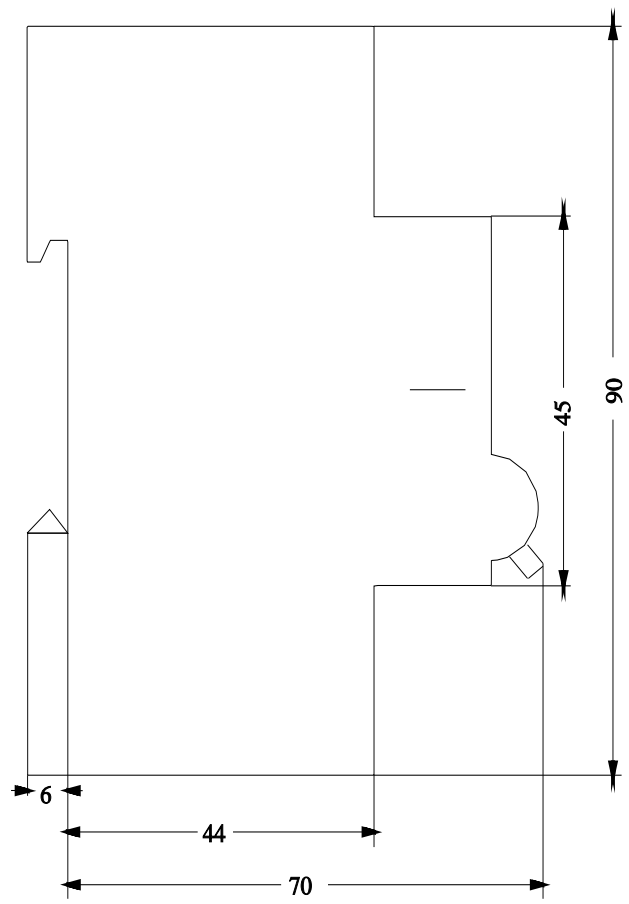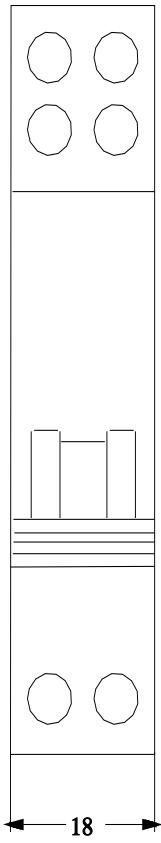

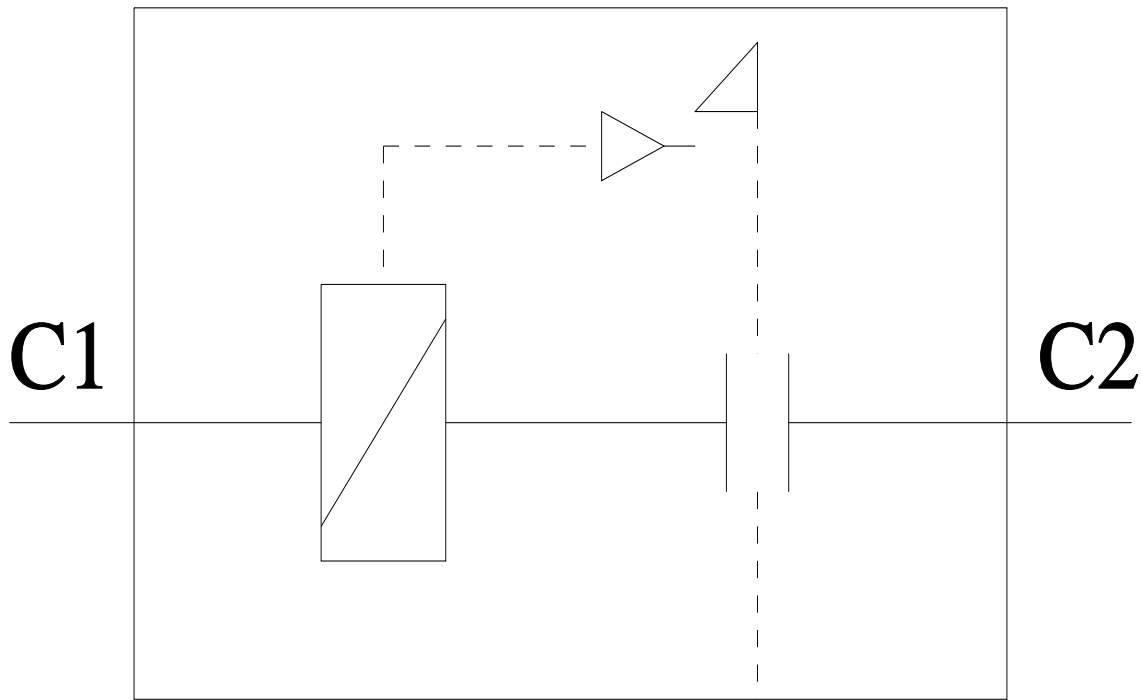

last modified:

11/24/2025 

TURLL

YOUR GLOBAL AUTOMATION PARTNER

5ST3031

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

sales@turl.com | +852 6339 7344