

| Model | |
|--|--|
| product brand name | SENTRON |
| product designation | RCBO |
| design of the product | Instantaneous |
| General technical data | |
| number of poles | 2 |
| number of poles with protection | 1 |
| design of pole | 1P+N |
| tripping characteristic class | C |
| mechanical service life (operating cycles) typical | 10 000 |
| overvoltage category | 3 |
| degree of pollution | 2 |
| Voltage | |
| type of voltage of the operating voltage | AC |
| insulation voltage (U _i) rated value | 253 V |
| surge voltage resistance rated value | 4 000 V |
| surge current resistance at (8/20) μ s | 1 kA |
| tripping fault current rated value | 30 mA |
| <ul style="list-style-type: none"> ● operational current <ul style="list-style-type: none"> — at 30 °C rated value — at 40 °C rated value — at 45 °C rated value — at 50 °C rated value — at 55 °C rated value — at 60 °C rated value — at 65 °C rated value — at 70 °C rated value ● operational current at AC rated value | 4 A 3.8 A 3.72 A 3.6 A 3.52 A 3.4 A 3.32 A 3.2 A 4 A |
| residual current type | A |
| Supply voltage | |
| supply voltage <ul style="list-style-type: none"> ● at AC rated value ● for testing equipment minimum | 230 V 195 V |
| operating frequency | 50/60 Hz |

| | |
|--|---|
| supply voltage frequency rated value | 50 Hz |
| Protection class | |
| protection class IP | IP20, if the distribution board is installed, with connected conductors |
| Breaking Capacity | |
| switching capacity current | |
| • according to EN 60898 rated value | 6 kA |
| • according to IEC 60947-2 rated value | 10 kA |
| short-circuit current breaking capacity (I _{cn}) according to EN 61009-1 rated value | 6 kA |
| rated residual switching capacity (I _{Δm}) according to IEC 61009-1 | 4.5 kA |
| energy limitation class | 3 |
| Dissipation | |
| power loss [W] | |
| • maximum | 2.3 W |
| Product details | |
| product feature touch protection | Yes |
| product component neutral conductor switching | Yes |
| product feature halogen-free | Yes |
| product feature silicon-free | Yes |
| Connections | |
| connectable conductor cross-section solid | |
| • minimum | 0.75 mm ² |
| • maximum | 16 mm ² |
| connectable conductor cross-section stranded | |
| • minimum | 0.75 mm ² |
| • maximum | 16 mm ² |
| connectable conductor cross-section finely stranded with core end processing | |
| • minimum | 0.75 mm ² |
| • maximum | 10 mm ² |
| tightening torque with screw-type terminals | |
| • minimum | 1.2 N·m |
| • maximum | 2 N·m |
| position of power supply cord | Either top or bottom |
| Mechanical Design | |
| height | 90 mm |
| width | 18 mm |
| depth | 77 mm |
| installation depth | 70 mm |
| number of modular width units | 1 |
| mounting position | any |
| Net Weight | 128.5 g |
| weight with packaging | 133 g |
| Environmental conditions | |
| influence of the surrounding temperature | Max. 95% humidity |
| ambient temperature during operation | |
| • minimum | -25 °C |
| • maximum | 45 °C |
| ambient temperature during storage | |
| • minimum | -40 °C |
| • maximum | 75 °C |
| number of test cycles for environmental testing according to IEC 60068-2-30 | 28 |
| Environmental footprint | |
| Environmental Product Declaration (EPD) | Yes |
| global warming potential [CO ₂ eq] total | 17.95026 kg |
| global warming potential [CO ₂ eq] during manufacturing | 1.32 kg |
| global warming potential [CO ₂ eq] during operation | 16.6 kg |
| global warming potential [CO ₂ eq] after end of life | 0.0016 kg |

Siemens Eco Profile (SEP) Siemens EcoTech

Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval Test Certificates other



[Miscellaneous](#)

[Special Test Certificate](#)

[Miscellaneous](#)



[Confirmation](#)

other Dangerous goods Environment

[Miscellaneous](#)

[Transport Information](#)

Siemens EcoTech



[Environmental Confirmations](#)



[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SV1316-7KK04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SV1316-7KK04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SV1316-7KK04



CAX-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

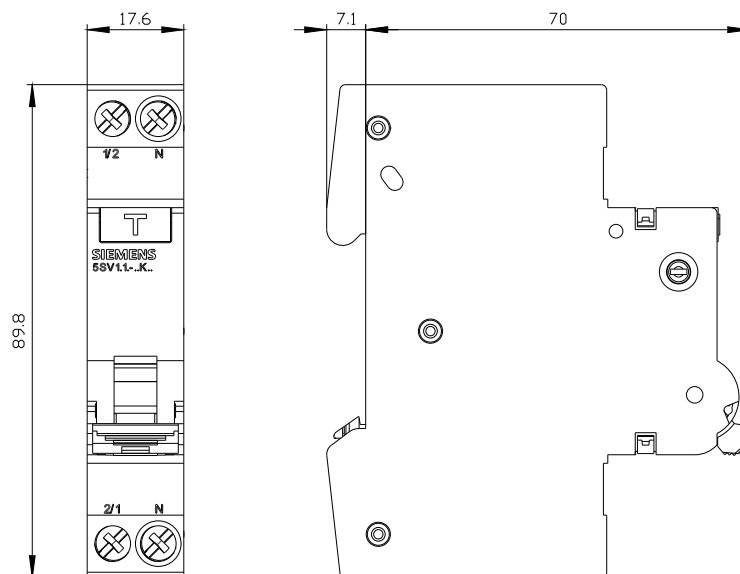

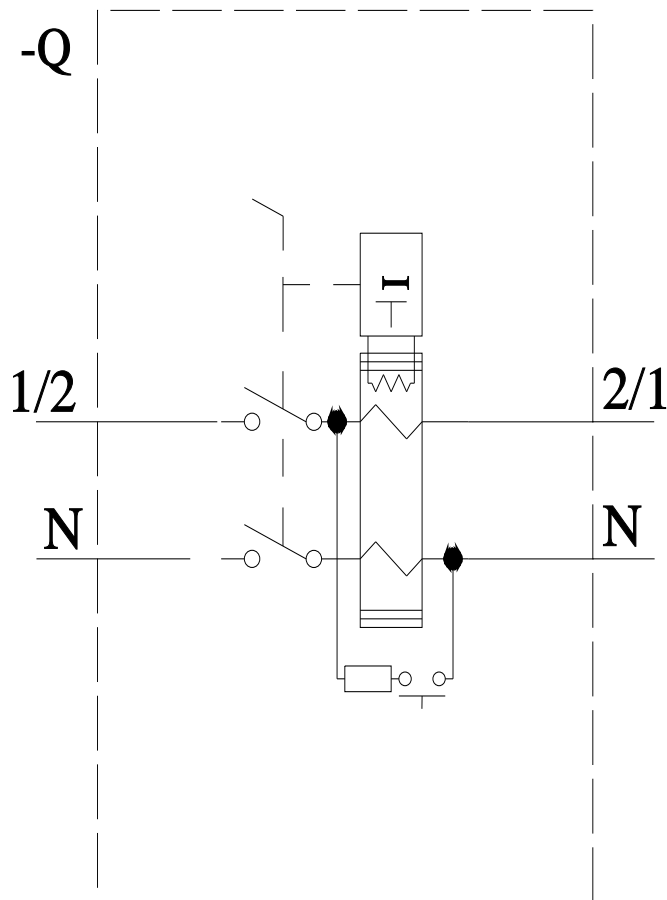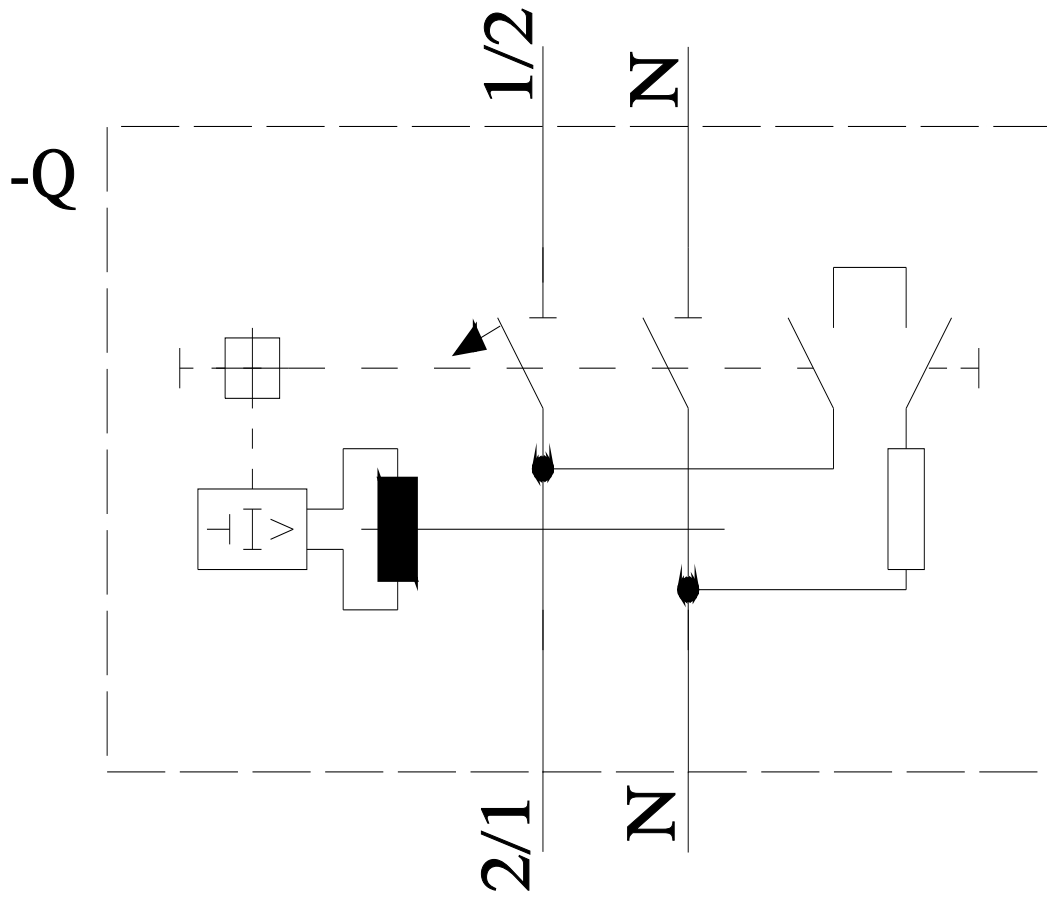

last modified:

7/22/2025 

TURLL

YOUR GLOBAL AUTOMATION PARTNER

5SV1316-7KK04

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

sales@turl.com | +852 6339 7344