


## Data sheet

## 6ES7148-4FA00-0AB0

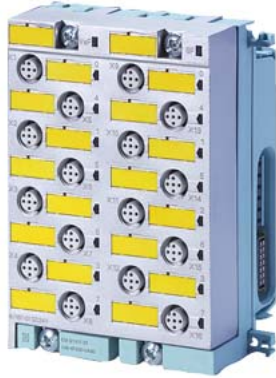

SIMATIC DP, ET200 PRO Fail-safe electronic module 8/16 F-DI 24 V DC PROFIsafe, 90 mm overall width, up to Category 4 (EN 954-1)/ SIL3 (IEC61508)/PLE (ISO13849)

Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
power supply according to NEC Class 2 required	No
Input current	
from supply voltage 1L+, max.	120 mA; Typical
from backplane bus 3.3 V DC, max.	20 mA
Power loss	
Power loss, typ.	4.5 W
Digital inputs	
Number of digital inputs	16
Input current	
<ul style="list-style-type: none"> <li>for signal "1", typ.</li> </ul>	3.7 mA
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
<ul style="list-style-type: none"> <li>Performance level according to ISO 13849-1</li> <li>SIL acc. to IEC 61508</li> </ul>	e 3
Dimensions	
Width	90 mm
Height	130 mm
Depth	65 mm
Classifications	

	Version	Classification
eClass	14	27-24-26-04
eClass	12	27-24-26-04
eClass	9.1	27-24-26-04
eClass	9	27-24-26-04
eClass	8	27-24-26-04
eClass	7.1	27-24-26-04
eClass	6	27-24-26-04
ETIM	10	EC001599
ETIM	9	EC001599
ETIM	8	EC001599
ETIM	7	EC001599
IDEA	4	3566
UNSPSC	15	32-15-17-05

Approvals / Certificates

General Product Approval

[Miscellaneous](#)

[China RoHS](#)

[Manufacturer Declaration](#)



General Product Approval

Functional Safety

Maritime application



[TUEV](#)

[Type Examination Certificate](#)



Maritime application



[NK / Nippon Kaiji Kyokai](#)



Maritime application

[CCS \(China Classification Society\)](#)

[KR \(Korean Register of Shipping\)](#)

last modified:

4/7/2025

# TURLL

YOUR GLOBAL AUTOMATION PARTNER

## 6ES7148-4FA00-0AB0

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

[sales@turl.com](mailto:sales@turl.com) | +852 6339 7344