

## Data sheet

## 6ES7441-2AA05-0AE0



SIMATIC S7-400, coupling module CP 441-2 for point-to-point connections, 2 channels incl. configuration package on CD

Supply voltage	
Rated value (DC)	
• 5 V DC	Yes
• 24 V DC	Yes
Input current	
from backplane bus 5 V DC, max.	300 mA; Without interface module
Power loss	
Power loss, typ.	2.7 W; incl. 2x20mA TTY module
Storage	
Memory requirements per interface in memory card of S7-CPU	1 to 5 KB for parameters; 0 to 55 KB for message texts; 0 to 64 KB for loadable drivers
Interfaces	
Number of interfaces	2; variable
Point-to-point connection	
• Transmission rate, max.	115.2 kbit/s; Min. 300 bps
• supported printers	HP-Deskjet, HP-Laserjet, IBM-Proprinter, user-defined
Integrated protocol driver	
— 3964 (R)	Yes
— ASCII	Yes
— RK 512	Yes
— Printer	Yes
— customer-specific drivers reloadable	No
Transmission rate, 20 mA (TTY)	
— with 3964 (R) protocol, max.	19.2 kbit/s
— with ASCII protocol, max.	19.2 kbit/s
— with printer driver, max.	19.2 kbit/s
— with RK 512 protocol, max.	19.2 kbit/s
Transmission rate, RS 422/485	
— with 3964 (R) protocol, max.	115.2 kbit/s
— with ASCII protocol, max.	115.2 kbit/s
— with printer driver, max.	115.2 kbit/s
— with RK 512 protocol, max.	115.2 kbit/s
Transmission speed, RS 232	
— with 3964 (R) protocol, max.	115.2 kbit/s
— with ASCII protocol, max.	115.2 kbit/s
— with printer driver, max.	115.2 kbit/s
— with RK 512 protocol, max.	115.2 kbit/s
Ambient conditions	
Ambient temperature during operation	

• min.	0 °C
• max.	60 °C
Ambient temperature during storage/transportation	
• min.	0 °C
• max.	70 °C
Relative humidity	
• Operation, max.	95 %; no condensation

<b>Dimensions</b>	
Width	25 mm
Height	290 mm
Depth	210 mm

<b>Weights</b>	
Weight, approx.	580 g; Interface modules: 80 g


<b>Classifications</b>			
		<b>Version</b>	<b>Classification</b>
	eClass	14	27-24-22-08
	eClass	12	27-24-22-08
	eClass	9.1	27-24-22-08
	eClass	9	27-24-22-08
	eClass	8	27-24-22-08
	eClass	7.1	27-24-22-08
	eClass	6	27-24-22-08
	ETIM	10	EC001423
	ETIM	9	EC001423
	ETIM	8	EC001423
	ETIM	7	EC001423
	IDEA	4	3564
	UNSPSC	15	32-15-17-05

**Approvals / Certificates**

**General Product Approval**




**General Product Approval**      **For use in hazardous locations**

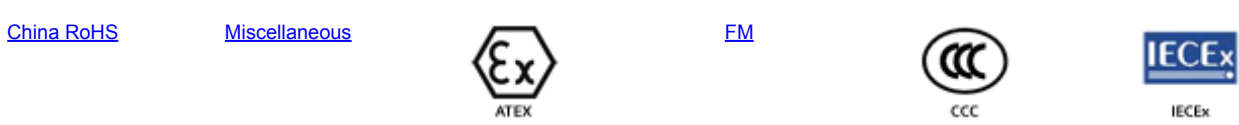

**For use in hazardous locations**      **Maritime application**



**Maritime application**



---

last modified:

6/7/2025 

# TURLL

YOUR GLOBAL AUTOMATION PARTNER

## 6ES7441-2AA05-0AE0

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

sales@turl.com | +852 6339 7344