

## Data sheet

## 6ES7650-8BK60-0AA0

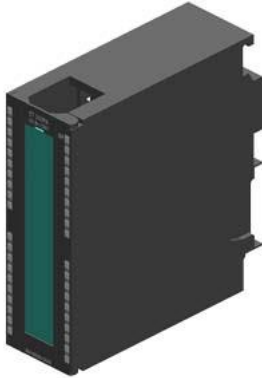


Figure similar

ET 200PA SMART, analog output isolated, 8 AQ U/I, diagnostics, resolution 11/12 bit, 40-pole, IM 650-8PH required

General information	
Product function	
• Isochronous mode	No
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Input current	
from load voltage L+ (without load), max.	340 mA
from backplane bus 5 V DC, max.	100 mA
Power loss	
Power loss, typ.	6 W
Analog outputs	
Number of analog outputs	8
Voltage output, short-circuit protection	Yes
Voltage output, short-circuit current, max.	25 mA
Current output, no-load voltage, max.	18 V
Output ranges, voltage	
• 0 to 10 V	Yes
• 1 V to 5 V	Yes
• -10 V to +10 V	Yes
Output ranges, current	
• 0 to 20 mA	Yes
• -20 mA to +20 mA	Yes
• 4 mA to 20 mA	Yes
Connection of actuators	
• for voltage output four-wire connection	Yes
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 k $\Omega$
• with voltage outputs, capacitive load, max.	1 $\mu$ F
• with current outputs, max.	500 $\Omega$
• with current outputs, inductive load, max.	10 mH
Destruction limits against externally applied voltages and currents	
• Voltages at the outputs towards MANA	18 V; continuous; 75 V for max. 1 s (mark to space ratio 1:20)
• Current, max.	50 mA; DC
Cable length	
• shielded, max.	200 m

Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	12 bit; $\pm 10$ V, $\pm 20$ mA, 4 mA to 20 mA, 1 V to 5 V: 11 bit + sign; 0 V to 10 V, 0 mA to 20 mA: 12 bit
• Conversion time (per channel)	0.8 ms
Settling time	
• for resistive load	0.2 ms
• for capacitive load	3.3 ms
• for inductive load	0.5 ms; 0.5 ms (1 mH); 3.3 ms (10 mH)
Errors/accuracies	
Output ripple (relative to output range, bandwidth 0 to 50 kHz), (+/-)	0.05 %
Linearity error (relative to output range), (+/-)	0.05 %
Temperature error (relative to output range), (+/-)	0.002 %/K
Crosstalk between the outputs, min.	40 dB
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.05 %
Operational error limit in overall temperature range	
• Voltage, relative to output range, (+/-)	0.5 %
• Current, relative to output range, (+/-)	0.6 %
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to output range, (+/-)	0.4 %
• Current, relative to output range, (+/-)	0.5 %
Interrupts/diagnostics/status information	
Diagnostics function	Yes; Parameterizable
Substitute values connectable	Yes; channel by channel, parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Diagnostic information readable	Yes; possible
Diagnostics indication LED	
• Group error SF (red)	Yes
Potential separation	
Potential separation analog outputs	
• between the channels	No
• between the channels and backplane bus	Yes
• Between the channels and load voltage L+	Yes
• between the channels and the power supply of the electronics	Yes
Permissible potential difference	
between MANA and M internally (UISO)	75 V DC/60 V AC
between S- and MANA (UCM)	3 V DC
Isolation	
Isolation tested with	500 V DC
Connection method	
required front connector	40-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	272 g
Classifications	

	Version	Classification
eClass	14	27-24-26-01
eClass	12	27-24-26-01
eClass	9.1	27-24-26-01
eClass	9	27-24-26-01

eClass	8	27-24-26-01
eClass	7.1	27-24-26-01
eClass	6	27-24-26-01
ETIM	10	EC001596
ETIM	9	EC001596
ETIM	8	EC001596
ETIM	7	EC001596
IDEA	4	3562
UNSPSC	15	32-15-17-05

Approvals / Certificates

General Product Approval	For use in hazardous locations
--------------------------	--------------------------------



[China RoHS](#)

[Manufacturer Declaration](#)



last modified:

6/7/2025

# TURLL

YOUR GLOBAL AUTOMATION PARTNER

## 6ES7650-8BK60-0AA0

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

sales@turl.com | +852 6339 7344