


Data sheet

6ES7963-1AA10-0AA0

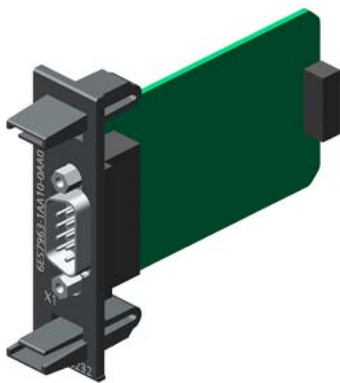

SIMATIC S7-400, interface module IF963-RS232 with RS232 interface for PTP coupling with CP441 AB CP 441- AA05

Input current			
Current consumption, max.	15 mA		
Power loss			
Power loss, typ.	0.05 W		
Interfaces			
Point-to-point connection			
• Transmission rate, max.	115.2 kbit/s		
• Cable length, max.	15 m		
Dimensions			
Width	19 mm		
Height	67 mm		
Depth	87 mm		
Weights			
Weight, approx.	80 g		
Classifications			
		Version	Classification
	eClass	16	27-24-22-08
	eClass	14	27-24-22-08
	eClass	12	27-24-22-08
	eClass	9.1	27-24-22-08
	eClass	9	27-24-22-08
	eClass	8	27-24-22-08
	eClass	7.1	27-24-22-08
	eClass	6	27-24-22-08
	ETIM	10	EC001423
	ETIM	9	EC001423
	ETIM	8	EC001423
	ETIM	7	EC001423
	IDEA	4	3564
	UNSPSC	15	32-15-17-05
Approvals / Certificates			
General Product Approval			



[Miscellaneous](#)



General Product Approval

For use in hazardous locations

[Miscellaneous](#)

[China RoHS](#)

[Manufacturer Declaration](#)



[EM](#)

For use in hazardous locations

Maritime application



[Type Examination Certificate](#)



Maritime application



[CCS \(China Classification Society\)](#)

last modified:

6/7/2025

TURLL

YOUR GLOBAL AUTOMATION PARTNER

6ES7963-1AA10-0AA0

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

CHECK STOCK & PRICE



Need Assistance? Scan to Chat on WhatsApp

sales@turll.com | +852 6339 7344