




Data sheet

6ES7963-2AA10-0AA0

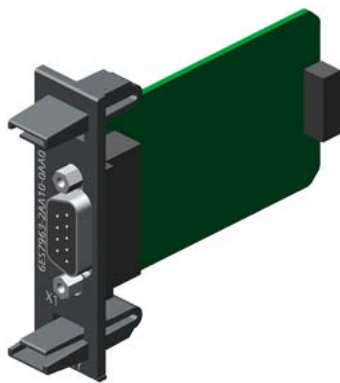

SIMATIC S7-400, interface module IF963-TTY with TTY interface for PTP coupling with CP441 AB CP 441- AA05

Input current	
Current consumption, max.	15 mA from 3.3 V; 23 mA from 24 V
Power loss	
Power loss, typ.	0.6 W
Interfaces	
Point-to-point connection	
• Transmission rate, max.	19.2 kbit/s
• Cable length, max.	1 000 m; at 9 600 bps
Dimensions	
Width	19 mm
Height	67 mm
Depth	87 mm
Weights	
Weight, approx.	80 g
Classifications	

	Version	Classification
eClass	14	27-24-22-08
eClass	12	27-24-22-08
eClass	9.1	27-24-22-08
eClass	9	27-24-22-08
eClass	8	27-24-22-08
eClass	7.1	27-24-22-08
eClass	6	27-24-22-08
ETIM	10	EC001423
ETIM	9	EC001423
ETIM	8	EC001423
ETIM	7	EC001423
IDEA	4	3564
UNSPSC	15	32-15-17-05

Approvals / Certificates	
General Product Approval	



[Miscellaneous](#)



General Product Approval		For use in hazardous locations			
Miscellaneous	China RoHS	 IECEX	 ATEX	EM	 CCC
For use in hazardous locations		Maritime application			
 IECEX	Type Examination Certificate	 ATEX	 DNV	 LRS	 RINA
Maritime application					
CCS (China Classification Society)					

last modified:

6/7/2025

TURLL

YOUR GLOBAL AUTOMATION PARTNER

6ES7963-2AA10-0AA0

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

CHECK STOCK & PRICE



Need Assistance? Scan to Chat on WhatsApp

sales@turll.com | +852 6339 7344