


Data sheet

6ES7963-3AA10-0AA0

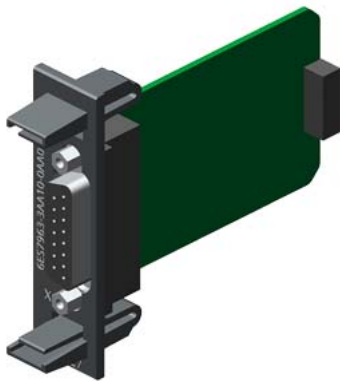

SIMATIC S7-400, interface module IF963-X27 with RS422/RS485 interface for PTP coupling with CP441 AB CP 441- AA05

Input current	
Current consumption, max.	41 mA
Power loss	
Power loss, typ.	0.14 W
Interfaces	
Point-to-point connection	
• Transmission rate, max.	115.2 kbit/s
• Cable length, max.	1 200 m; at 19 200 bps
Dimensions	
Width	19 mm
Height	67 mm
Depth	87 mm
Weights	
Weight, approx.	80 g
Classifications	

	Version	Classification
eClass	14	27-24-22-08
eClass	12	27-24-22-08
eClass	9.1	27-24-22-08
eClass	9	27-24-22-08
eClass	8	27-24-22-08
eClass	7.1	27-24-22-08
eClass	6	27-24-22-08
ETIM	10	EC001423
ETIM	9	EC001423
ETIM	8	EC001423
ETIM	7	EC001423
IDEA	4	3564
UNSPSC	15	32-15-17-05

Approvals / Certificates	
General Product Approval	



[Miscellaneous](#)



General Product Approval			For use in hazardous locations		
Miscellaneous	China RoHS	Manufacturer Declaration	 IECEX	 ATEX	EM
For use in hazardous locations			Maritime application		
 CCC	 IECEX	Type Examination Certificate	 ATEX	 DNV	 LRS
Maritime application					
 RINA	CCS (China Classification Society)				

last modified:

6/7/2025 

TURLL

YOUR GLOBAL AUTOMATION PARTNER

6ES7963-3AA10-0AA0

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

CHECK STOCK & PRICE



Need Assistance? Scan to Chat on WhatsApp

sales@turll.com | +852 6339 7344