

## Data sheet for SINAMICS G120C



Figure similar

Article No. : 6SL3210-1KE12-3AF2

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

### Rated data

#### Input

|                    |                           |
|--------------------|---------------------------|
| Number of phases   | 3 AC                      |
| Line voltage       | 380 ... 480 V +10 % -20 % |
| Line frequency     | 47 ... 63 Hz              |
| Rated current (LO) | 2.90 A                    |
| Rated current (HO) | 2.50 A                    |

#### Output

|                                     |                 |                    |
|-------------------------------------|-----------------|--------------------|
| Number of phases                    | 3 AC            |                    |
| <b>Rated voltage</b>                | <b>400V IEC</b> | <b>480V NEC 1)</b> |
| Rated power (LO)                    | 0.75 kW         | 1.00 hp            |
| Rated power (HO)                    | 0.55 kW         | 0.75 hp            |
| Rated current (LO)                  | 2.20 A          |                    |
| Rated current (HO)                  | 1.70 A          |                    |
| Rated current (IN)                  | 2.30 A          |                    |
| Max. output current                 | 3.40 A          |                    |
| Pulse frequency                     | 4 kHz           |                    |
| Output frequency for vector control | 0 ... 240 Hz    |                    |
| Output frequency for V/f control    | 0 ... 550 Hz    |                    |

#### Overload capability

|   |
|---|
| Low Overload (LO)   |
| 150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time |
| High Overload (HO)  |
| 200% base load current IH for 3 s, followed by 150% base load current IH for 57 s in a 300 s cycle time   |

### General tech. specifications

|                              |               |
|------------------------------|---------------|
| Power factor $\lambda$       | 0.70 ... 0.85 |
| Offset factor $\cos \varphi$ | 0.95          |
| Efficiency $\eta$            | 0.97          |
| Sound pressure level (1m)    | 49 dB         |
| Power loss                   | 39.0 W        |
| Filter class (integrated)    | Class A       |

### Communication

|               |                       |
|---------------|-----------------------|
| Communication | PROFINET, EtherNet/IP |
|---------------|-----------------------|

### Inputs / outputs

#### Standard digital inputs

|                      |       |
|----------------------|-------|
| Number               | 6     |
| Switching level: 0→1 | 11 V  |
| Switching level: 1→0 | 5 V   |
| Max. inrush current  | 15 mA |

#### Fail-safe digital inputs

|        |   |
|--------|---|
| Number | 1 |
|--------|---|

#### Digital outputs

|                                    |                |
|------------------------------------|----------------|
| Number as relay changeover contact | 1              |
| Output (resistive load)            | DC 30 V, 0.5 A |
| Number as transistor               | 1              |
| Output (resistive load)            | DC 30 V, 0.5 A |

#### Analog / digital inputs

|            |                        |
|------------|------------------------|
| Number     | 1 (Differential input) |
| Resolution | 10 bit                 |

#### Switching threshold as digital input

|     |       |
|-----|-------|
| 0→1 | 4 V   |
| 1→0 | 1.6 V |

#### Analog outputs

|        |                         |
|--------|-------------------------|
| Number | 1 (Non-isolated output) |
|--------|-------------------------|

#### PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy  $\pm 5^\circ\text{C}$

### Closed-loop control techniques

|   |     |
|---|-----|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC)       | Yes |
| V/f ECO linear / square-law               | Yes |
| Sensorless vector control                 | Yes |
| Vector control, with sensor               | No  |
| Encoderless torque control                | No  |
| Torque control, with encoder              | No  |

## Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE12-3AF2

### Ambient conditions

|                         |  |
|-------------------------|--|
| Cooling                 | Air cooling using an integrated fan                |
| Cooling air requirement | 0.005 m <sup>3</sup> /s (0.177 ft <sup>3</sup> /s) |
| Installation altitude   | 1,000 m (3,280.84 ft)                              |

### Ambient temperature

|           |                                |
|-----------|--------------------------------|
| Operation | -10 ... 40 °C (14 ... 104 °F)  |
| Transport | -40 ... 70 °C (-40 ... 158 °F) |
| Storage   | -25 ... 55 °C (-13 ... 131 °F) |

### Relative humidity

|                |  |
|----------------|--|
| Max. operation | 95 % At 40 °C (104 °F), condensation and icing not permissible |
|----------------|--|

### Connections

#### Signal cable

|                         |  |
|-------------------------|--|
| Conductor cross-section | 0.15 ... 1.50 mm <sup>2</sup><br>(AWG 24 ... AWG 16) |
|-------------------------|--|

#### Line side

|                         |  |
|-------------------------|--|
| Version                 | Plug-in screw terminals                              |
| Conductor cross-section | 1.00 ... 2.50 mm <sup>2</sup><br>(AWG 18 ... AWG 14) |

#### Motor end

|                         |  |
|-------------------------|--|
| Version                 | Plug-in screw terminals                              |
| Conductor cross-section | 1.00 ... 2.50 mm <sup>2</sup><br>(AWG 18 ... AWG 14) |

#### DC link (for braking resistor)

|                         |  |
|-------------------------|--|
| Version                 | Plug-in screw terminals                              |
| Conductor cross-section | 1.00 ... 2.50 mm <sup>2</sup><br>(AWG 18 ... AWG 14) |
| Line length, max.       | 15 m (49.21 ft)                                      |
| PE connection           | On housing with M4 screw                             |

#### Max. motor cable length

|            |                   |
|------------|-------------------|
| Shielded   | 50 m (164.04 ft)  |
| Unshielded | 100 m (328.08 ft) |

### Mechanical data

|                      |                     |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Frame size           | FSAA                |
| Net weight           | 1.40 kg (3.09 lb)   |

### Dimensions


|        |                  |
|--------|------------------|
| Width  | 73 mm (2.87 in)  |
| Height | 173 mm (6.81 in) |
| Depth  | 160 mm (7.01 in) |

### Standards

|                           |   |
|---------------------------|---|
| Compliance with standards | CE, cUL, UL, KC, EAC, C-Tick (RCM)                          |
| CE marking                | EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC |

### Converter losses to IEC61800-9-2\*

|  |        |
|--|--------|
| Efficiency class                                     | IE2    |
| Comparison with the reference converter (90% / 100%) | 26.9 % |

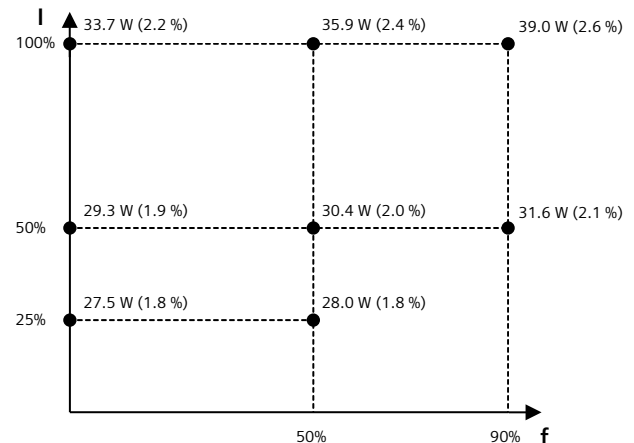

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V

# TURLL

YOUR GLOBAL AUTOMATION PARTNER

## 6SL3210-1KE12-3AF2

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

sales@turl.com | +852 6339 7344