

Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE23-2AF1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Figure similar



Rated data		
Input		
Number of phases	3 AC	
Line voltage	380 ... 480 V +10 % -20 %	
Line frequency	47 ... 63 Hz	
Rated current (LO)	40.60 A	
Rated current (HO)	36.40 A	
Output		
Number of phases	3 AC	
Rated voltage	400V IEC	480V NEC ¹⁾
Rated power (LO)	15.00 kW	20.00 hp
Rated power (HO)	11.00 kW	15.00 hp
Rated current (LO)	31.00 A	
Rated current (HO)	25.00 A	
Rated current (IN)	32.00 A	
Max. output current	50.00 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 240 Hz	
Output frequency for V/f control	0 ... 550 Hz	

Overload capability

Low Overload (LO)

150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time

High Overload (HO)

200% base load current IH for 3 s, followed by 150% base load current IH for 57 s in a 300 s cycle time

General tech. specifications	
Power factor λ	0.70 ... 0.85
Offset factor $\cos \varphi$	0.95
Efficiency η	0.97
Sound pressure level (1m)	66 dB
Power loss	371.0 W
Filter class (integrated)	Class A

Communication

Communication PROFINET, EtherNet/IP

Inputs / outputs	
Standard digital inputs	
Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA
Fail-safe digital inputs	
Number	1
Digital outputs	
Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 0.5 A
Number as transistor	1
Output (resistive load)	DC 30 V, 0.5 A
Analog / digital inputs	
Number	1 (Differential input)
Resolution	10 bit
Switching threshold as digital input	
0→1	4 V
1→0	1.6 V
Analog outputs	
Number	1 (Non-isolated output)
PTC/ KTY interface	
1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy $\pm 5^\circ\text{C}$	

Closed-loop control techniques

V/f linear / square-law / parameterizable Yes

V/f with flux current control (FCC) Yes

V/f ECO linear / square-law Yes

Sensorless vector control Yes

Vector control, with sensor No

Encoderless torque control No

Torque control, with encoder No

Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE23-2AF1

Ambient conditions	
Cooling	Air cooling using an integrated fan
Cooling air requirement	0.018 m³/s (0.636 ft³/s)
Installation altitude	1,000 m (3,280.84 ft)

Ambient temperature

Operation	-10 ... 40 °C (14 ... 104 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)

Relative humidity

Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
----------------	--

Connections

Signal cable

Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)
-------------------------	--

Line side

Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm² (AWG 10 ... AWG 6)

Motor end

Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm² (AWG 10 ... AWG 6)

DC link (for braking resistor)

Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm² (AWG 10 ... AWG 6)
Line length, max.	15 m (49.21 ft)
PE connection	On housing with M4 screw

Max. motor cable length

Shielded	50 m (164.04 ft)
Unshielded	100 m (328.08 ft)

Mechanical data

Degree of protection	IP20 / UL open type
Frame size	FSC
Net weight	4.40 kg (9.70 lb)

Dimensions


Width	140 mm (5.51 in)
Height	295 mm (11.61 in)
Depth	205 mm (8.19 in)

Standards

Compliance with standards	CE, cUL, UL, KC, EAC, C-Tick (RCM)
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Converter losses to IEC61800-9-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	34.2 %

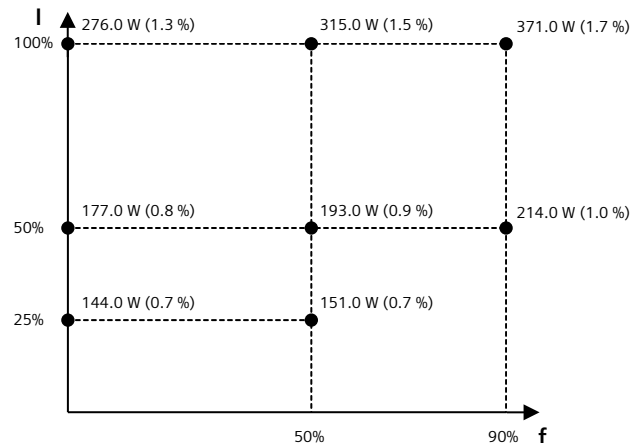

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V

TURLL

YOUR GLOBAL AUTOMATION PARTNER

6SL3210-1KE23-2AF1

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

CHECK STOCK & PRICE



Need Assistance? Scan to Chat on WhatsApp

sales@turll.com | +852 6339 7344