

## Data sheet for SINAMICS Power module PM240-2

Article No. : 6SL3210-1PE26-0AL0



Figure similar

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

### Rated data

Input			
Number of phases	3 AC		
Line voltage	380 ... 480 V $\pm$ 10 %		
Line frequency	47 ... 63 Hz		
Rated current (LO)	57.00 A		
Rated current (HO)	47.00 A		
Output			
Number of phases	3 AC		
<b>Rated voltage</b>	<b>400V IEC</b>	<b>480V NEC <sup>1)</sup></b>	
Rated power (LO)	30.00 kW	40.00 hp	
Rated power (HO)	22.00 kW	30.00 hp	
Rated current (LO)	60.00 A		
Rated current (HO)	45.00 A		
Max. output current	90.00 A		
Pulse frequency	4 kHz		
Output frequency for vector control	0 ... 200 Hz		
Output frequency for V/f control	0 ... 550 Hz		

### Overload capability

#### Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s  
1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

#### High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s  
2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

### General tech. specifications

Power factor $\lambda$	0.95
Offset factor $\cos \varphi$	0.99
Efficiency $\eta$	0.98
Sound pressure level (1m)	72 dB
Power loss	0.77 kW
Filter class (integrated)	Class A

### Ambient conditions

Cooling	Internal air cooling
Cooling air requirement	0.055 m <sup>3</sup> /s (1.942 ft <sup>3</sup> /s)
Installation altitude	1,000 m (3,280.84 ft)
Ambient temperature	
Operation LO	-20 ... 40 °C (-4 ... 104 °F)
Operation HO	-20 ... 50 °C (-4 ... 122 °F)
Transport	-25 ... 55 °C (-13 ... 131 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)
Relative humidity	
Max. operation	95 % RH, condensation not permitted

### Connections

#### Line side

Version	screw-type terminal
Conductor cross-section	10.00 ... 35.00 mm <sup>2</sup> (AWG 8 ... AWG 2)

#### Motor end

Version	Screw-type terminals
Conductor cross-section	10.00 ... 35.00 mm <sup>2</sup> (AWG 8 ... AWG 2)

#### DC link (for braking resistor)

Version	Screw-type terminals
Conductor cross-section	2.50 ... 16.00 mm <sup>2</sup> (AWG 14 ... AWG 6)
Cable length	10 m (32.81 ft)
PE connection	Screw-type terminals

#### Max. motor cable length

Shielded	200 m (656.17 ft)
Unshielded	300 m (984.25 ft)

### Mechanical data

Degree of protection	IP20 / UL open type
Frame size	FSD
Net weight	18.50 kg (40.79 lb)
Dimensions	
Width	200 mm (7.87 in)
Height	472 mm (18.58 in)
Depth	237 mm (9.33 in)

### Standards

Compliance with standards	UL, cUL, CE, C-Tick (RCM), SEMI F47
CE marking	Low-voltage directive 2006/95/EC


Check Price on Turll.com

## Data sheet for SINAMICS Power module PM240-2

Article No. : 6SL3210-1PE26-0AL0

### Converter losses to IEC61800-9-2\*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	42.90 %

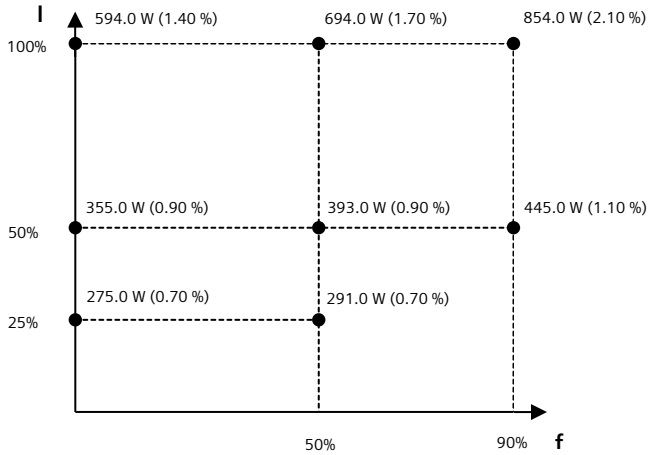

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V

# TURLL

YOUR GLOBAL AUTOMATION PARTNER

## 6SL3210-1PE26-0AL0

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

[sales@turl.com](mailto:sales@turl.com) | +852 6339 7344