



power contactor, AC-3, 16 A, 7.5 kW / 400 V, 4-pole, 48 V AC, 50/60 Hz, main contacts: 2 NO + 2 NC, screw terminal, size: S00

|   |                                       |
|---|---------------------------------------|
| product brand name  | SIRIUS                                |
| product designation   | contactor                             |
| product type designation  | 3RT25                                 |
| <b>General technical data</b>   |                                       |
| size of contactor   | S00                                   |
| product extension   |                                       |
| <ul style="list-style-type: none"> <li>function module for communication</li> <li>auxiliary switch</li> </ul>   | No<br>Yes                             |
| power loss [W] for rated value of the current   |                                       |
| <ul style="list-style-type: none"> <li>at AC in hot operating state per pole</li> <li>without load current share typical</li> </ul>   | 1 W<br>1.5 W                          |
| type of calculation of power loss depending on pole   | quadratic                             |
| insulation voltage  |                                       |
| <ul style="list-style-type: none"> <li>of main circuit with degree of pollution 3 rated value</li> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>   | 690 V<br>690 V                        |
| surge voltage resistance  |                                       |
| <ul style="list-style-type: none"> <li>of main circuit rated value</li> <li>of auxiliary circuit rated value</li> </ul>   | 6 kV<br>6 kV                          |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1  | 400 V                                 |
| shock resistance at rectangular impulse   |                                       |
| <ul style="list-style-type: none"> <li>at AC</li> </ul>   | 7,3g / 5 ms, 4,7g / 10 ms             |
| shock resistance with sine pulse  |                                       |
| <ul style="list-style-type: none"> <li>at AC</li> </ul>   | 11,4g / 5 ms, 7,3g / 10 ms            |
| mechanical service life (operating cycles)  |                                       |
| <ul style="list-style-type: none"> <li>of contactor typical</li> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> <li>of the contactor with added auxiliary switch block typical</li> </ul> | 30 000 000<br>5 000 000<br>10 000 000 |
| reference code according to IEC 81346-2   | Q                                     |
| Substance Prohibitance (Date)   | 10/01/2009                            |
| Net Weight  | 0.236 kg                              |
| <b>Ambient conditions</b>   |                                       |
| installation altitude at height above sea level maximum   | 2 000 m                               |
| ambient temperature   |                                       |
| <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> </ul>  | -25 ... +60 °C<br>-55 ... +80 °C      |
| relative humidity minimum   | 10 %                                  |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum  | 95 %                                  |

| Environmental footprint  |   |
|--|---|
| Environmental Product Declaration(EPD)   | Yes   |
| global warming potential [CO2 eq] total  | 39.6 kg   |
| global warming potential [CO2 eq] during manufacturing   | 1.18 kg   |
| global warming potential [CO2 eq] during operation   | 38.5 kg   |
| global warming potential [CO2 eq] after end of life  | -0.155 kg   |
| Main circuit   |   |
| <b>number of poles for main current circuit</b>  | 4   |
| <b>number of NO contacts for main contacts</b>   | 2   |
| <b>number of NC contacts for main contacts</b>   | 2   |
| <b>operational current</b>   |   |
| <ul style="list-style-type: none"> <li>● at AC-1 up to 690 V <ul style="list-style-type: none"> <li>— at ambient temperature 40 °C rated value</li> <li>— at ambient temperature 60 °C rated value</li> </ul> </li> <li>● at AC-2 at AC-3 at 400 V <ul style="list-style-type: none"> <li>— per NO contact rated value</li> <li>— per NC contact rated value</li> </ul> </li> </ul>  | 22 A<br>20 A<br>16 A<br>9 A   |
| minimum cross-section in main circuit at maximum AC-1 rated value  | 4 mm <sup>2</sup>   |
| <b>operational current</b>   |   |
| <ul style="list-style-type: none"> <li>● <b>at 1 current path at DC-1</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> </ul> </li> <li>● <b>with 2 current paths in series at DC-1</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> </ul> </li> <li>● <b>at 1 current path at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V per NC contact rated value</li> <li>— at 24 V per NO contact rated value</li> <li>— at 110 V per NC contact rated value</li> <li>— at 110 V per NO contact rated value</li> <li>— at 220 V per NC contact rated value</li> <li>— at 220 V per NO contact rated value</li> </ul> </li> <li>● <b>with 2 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V per NC contact rated value</li> <li>— at 24 V per NO contact rated value</li> <li>— at 110 V per NC contact rated value</li> <li>— at 110 V per NO contact rated value</li> </ul> </li> </ul> | 20 A<br>2.1 A<br>0.8 A<br>0.6 A<br>20 A<br>12 A<br>1.6 A<br>0.8 A<br>20 A<br>20 A<br>0.075 A<br>0.15 A<br>0.375 A<br>0.75 A<br>20 A<br>20 A<br>0.175 A<br>0.35 A  |
| operating power at AC-2 at AC-3  |   |
| <ul style="list-style-type: none"> <li>● at 230 V per NC contact rated value</li> <li>● at 230 V per NO contact rated value</li> <li>● at 400 V per NC contact rated value</li> <li>● at 400 V per NO contact rated value</li> </ul>   | 2.2 kW<br>4 kW<br>4 kW<br>7.5 kW  |
| <b>short-time withstand current in cold operating state up to 40 °C</b>  |   |
| <ul style="list-style-type: none"> <li>● limited to 1 s switching at zero current maximum</li> <li>● limited to 5 s switching at zero current maximum</li> <li>● limited to 10 s switching at zero current maximum</li> <li>● limited to 30 s switching at zero current maximum</li> <li>● limited to 60 s switching at zero current maximum</li> </ul>  | 165 A; Use minimum cross-section acc. to AC-1 rated value<br>165 A; Use minimum cross-section acc. to AC-1 rated value<br>128 A; Use minimum cross-section acc. to AC-1 rated value<br>92 A; Use minimum cross-section acc. to AC-1 rated value<br>74 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>power loss [W] at AC-3 at 400 V for rated value of the operational current per conductor</b>  | 1 W   |
| <b>power loss [W] at AC-3e at 400 V for rated value of the operational current per conductor</b>   | 1 W   |
| <b>no-load switching frequency</b>   |   |
| <ul style="list-style-type: none"> <li>● at AC</li> </ul>  | 10 000 1/h  |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>  | 10 000 1/h                                      |
| <b>operating frequency</b>   |   |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> </ul>                                | 1 000 1/h                                       |
| <b>Control circuit/ Control</b>  |   |
| <b>type of voltage of the control supply voltage</b>   | AC  |
| <b>control supply voltage at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>                           | 48 V  |
| <ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>                           | 48 V  |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>              |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                       | 0.8 ... 1.1                                     |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                                       | 0.85 ... 1.1                                    |
| <b>apparent pick-up power of magnet coil at AC</b>   | 37 VA   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                       | 37 VA   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                                       | 33 VA   |
| <b>inductive power factor with closing power of the coil</b>                                       | 0.8   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                       | 0.8   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                                       | 0.75  |
| <b>apparent holding power of magnet coil at AC</b>   | 5.7 VA  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                       | 5.7 VA  |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                                       | 4.4 VA  |
| <b>inductive power factor with the holding power of the coil</b>                                   | 0.25  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                       | 0.25  |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                                       | 0.25  |
| <b>closing delay</b>   |   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>  | 9 ... 35 ms                                     |
| <b>opening delay</b>   |   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>  | 4 ... 15 ms                                     |
| <b>arcing time</b>   | 10 ... 15 ms                                    |
| <b>residual current of the electronics for control with signal &lt;0&gt;</b>                       |   |
| <ul style="list-style-type: none"> <li>• at AC at 230 V maximum permissible</li> </ul>             | 0.004 A   |
| <b>Auxiliary circuit</b>   |   |
| number of NC contacts for auxiliary contacts instantaneous contact                                 | 0   |
| number of NO contacts for auxiliary contacts instantaneous contact                                 | 0   |
| operational current at AC-12 maximum   | 10 A  |
| <b>operational current at AC-15</b>  |   |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> </ul>                           | 10 A  |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>                           | 3 A   |
| <b>operational current at DC-12</b>  |   |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>                            | 6 A   |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>                            | 6 A   |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>                           | 3 A   |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>                           | 2 A   |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>                           | 1 A   |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>                           | 0.15 A  |
| <b>operational current at DC-13</b>  |   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>                            | 10 A  |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>                            | 2 A   |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>                            | 2 A   |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>                           | 1 A   |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>                           | 0.3 A   |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>                           | 0.1 A   |
| <b>contact reliability of auxiliary contacts</b>   | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>UL/CSA ratings</b>  |   |
| <b>yielded mechanical performance [hp]</b>   |   |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor at 230 V rated value</li> </ul> | 2 hp  |
| <ul style="list-style-type: none"> <li>• for 3-phase AC motor at 460/480 V rated value</li> </ul>  | 5 hp  |



|   |  |
|---|--|
| protection class IP on the front according to IEC 60529 | IP20   |
| touch protection on the front according to IEC 60529    | finger-safe, for vertical contact from the front |

**Approvals Certificates**

|                          |     |
|--------------------------|-----|
| General Product Approval | EMV |
|--------------------------|-----|



|                   |                      |
|-------------------|----------------------|
| Test Certificates | Maritime application |
|-------------------|----------------------|

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



|                      |       |
|----------------------|-------|
| Maritime application | other |
|----------------------|-------|



[Miscellaneous](#)



[Confirmation](#)

|         |             |
|---------|-------------|
| Railway | Environment |
|---------|-------------|

[Special Test Certificate](#)



[Environmental Confirmations](#)

**Further information**

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2518-1AH00>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2518-1AH00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2518-1AH00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2518-1AH00&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2518-1AH00&lang=en)


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RT2518-1AH00/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2518-1AH00&objecttype=14&gridview=view1>

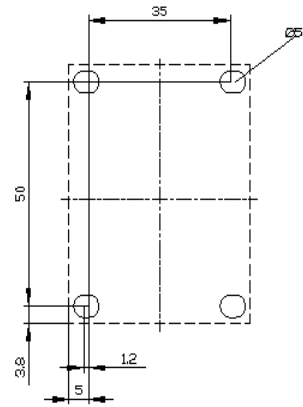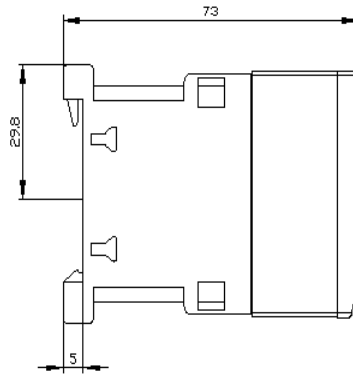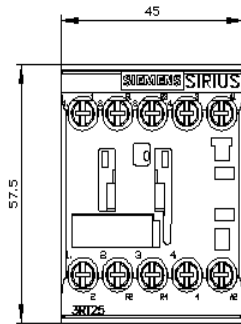

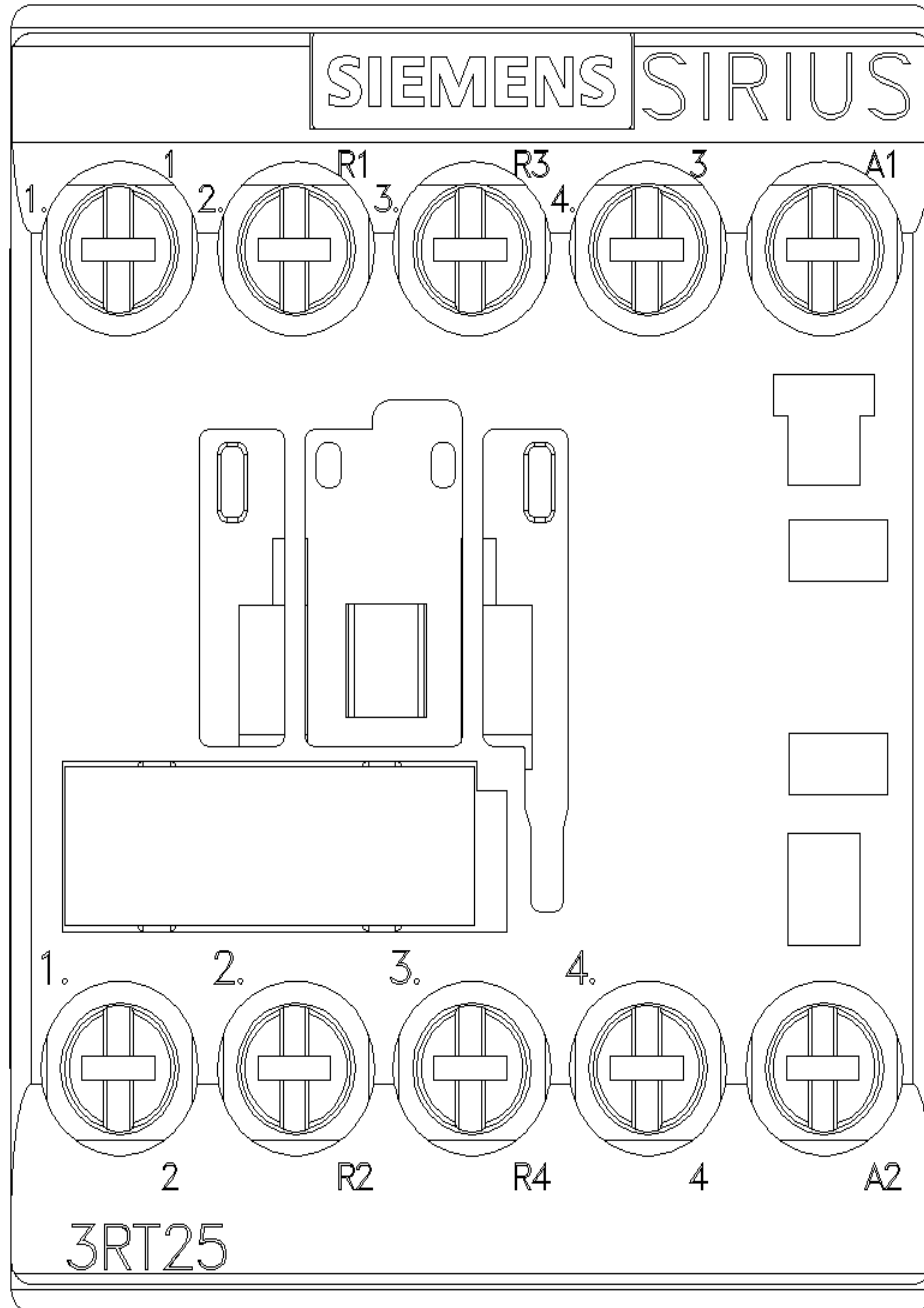

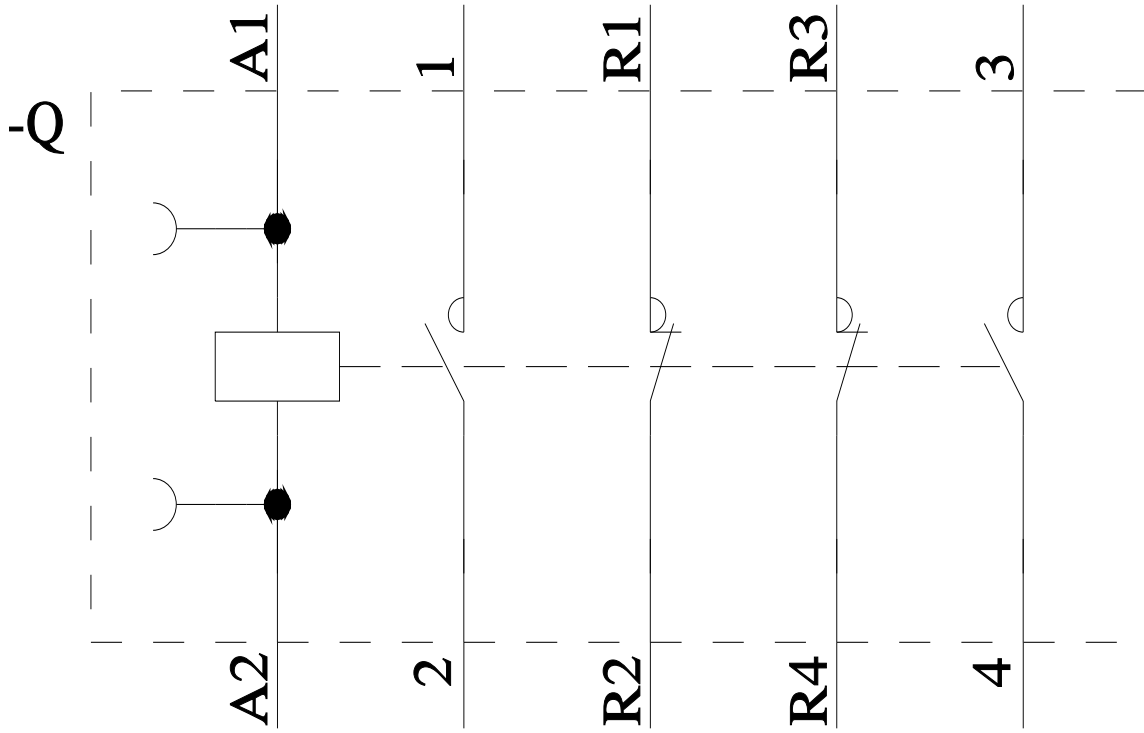

last modified:

11/11/2025

# TURLL

YOUR GLOBAL AUTOMATION PARTNER

## 3RT2518-1AH00

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

[sales@turl.com](mailto:sales@turl.com) | +852 6339 7344