

Data sheet

3RT5076-6AC36



Contactor 36 V AC/DC AC3 250 kW 400 V AC (50...60 Hz) / DC operation auxiliary contacts 2 NO + 2 NC, 3-pole, size S12 bar connections conventional operating mechan. screw terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT5
General technical data	
power loss [W] for rated value of the current	
• at AC in hot operating state per pole	55 W
• without load current share typical	10 W
type of calculation of power loss depending on pole	quadratic
Substance Prohibitance (Date)	03/01/2017
SVHC substance name	Lead - 7439-92-1
Net Weight	10.39 kg
Main circuit	
operating voltage	
• at AC-3 rated value maximum	1 000 V
• at AC-3e rated value maximum	1 000 V
operational current	
• at AC-3	
— at 400 V rated value	500 A
— at 690 V rated value	450 A
• at AC-3e	
— at 400 V rated value	500 A
— at 690 V rated value	450 A
— at 1000 V rated value	180 A
operating power	
• at AC-3	
— at 230 V rated value	160 kW
— at 500 V rated value	355 kW
— at 690 V rated value	400 kW
• at AC-3e	
— at 230 V rated value	160 kW
— at 400 V rated value	250 kW
— at 500 V rated value	355 kW
— at 690 V rated value	400 kW
— at 1000 V rated value	250 kW
operating frequency	
• at AC-3e maximum	420 1/h
UL/CSA ratings	
yielded mechanical performance [hp] for 3-phase AC motor at 460/480 V rated value	400 hp

Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover
Approvals Certificates	
General Product Approval	EMV



[Confirmation](#)



Maritime application	other	Environment
----------------------	-------	-------------

[CCS \(China Classification Society\)](#)




[Confirmation](#)

[Environmental Confirmations](#)

Further information

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/products?pnid=16027&lc=en-CN>

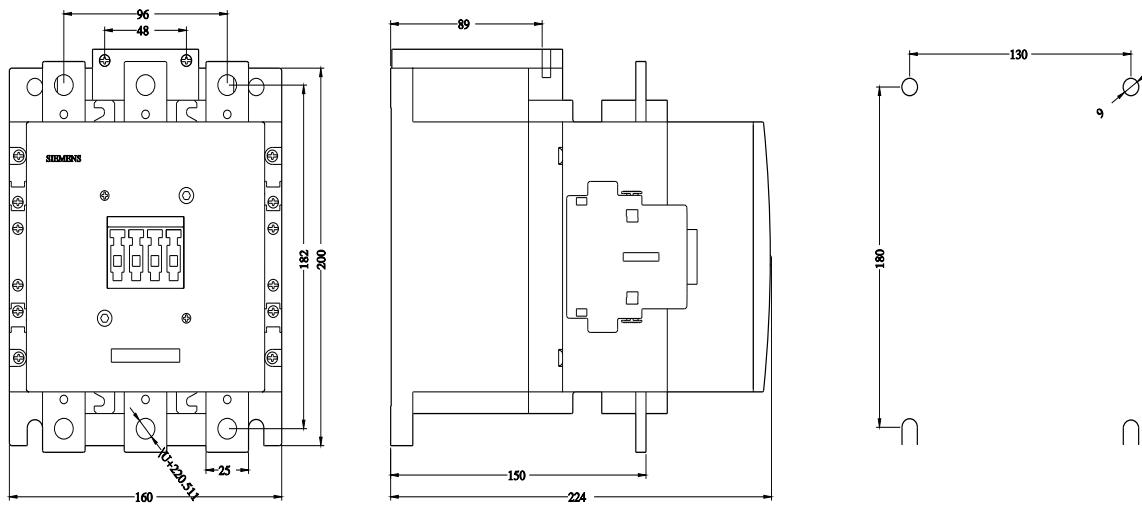

last modified:

4/3/2025

TURLL

YOUR GLOBAL AUTOMATION PARTNER

3RT5076-6AC36

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

sales@turl.com | +852 6339 7344