


Data sheet

6ES7193-6UP00-0DP1

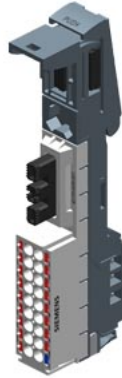

SIMATIC ET 200SP, Potential distributor module, PotDis-BaseUnit PotDis-BU Typ P1, light-colored, 17 x P1-potential, 1 x P2-potential, Push-In terminals. P1-, P2- and AUX-rail disconnected from left BU, Packaging Unit: 1 Piece, WxH: 15mm x 117mm

General information	
Product type designation	PotDis BU type P1, light version
HW functional status	FS10 and higher
Color code for module-specific color-coded label	CC62
Supply voltage	
Rated value (DC)	
<ul style="list-style-type: none"> For P1 and P2 bus for process terminals 	48 V; max. 48 V; max.
external protection for power supply lines	Yes; 10 A miniature circuit breaker with type B or C tripping characteristic for the respective rated supply voltage
Current carrying capacity	
For P1 and P2 bus, max.	10 A
For process terminals, max.	10 A
Hardware configuration	
Formation of potential groups	
<ul style="list-style-type: none"> New potential group Potential group continued from the left 	Yes No
Slots	
<ul style="list-style-type: none"> Number of slots 	1
Potential separation	
between backplane bus and supply voltage	Yes
Isolation	
Isolation tested with	3 250 V DC
Standards, approvals, certificates	
Ecological footprint	
<ul style="list-style-type: none"> environmental product declaration 	Yes
Global warming potential	
— global warming potential, (total) [CO2 eq]	0.873 kg
— global warming potential, (during production) [CO2 eq]	0.866 kg
— global warming potential, (during operation) [CO2 eq]	0 kg
— global warming potential, (after end of life cycle) [CO2 eq]	-0.0011 kg
Ambient conditions	
Ambient temperature during operation	
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. vertical installation, min. vertical installation, max. 	-30 °C 60 °C -30 °C 50 °C

Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Absolute humidity	
• dew point, min.	-60 °C; suitable for dry room applications

Accessories	
Color coding labels	
• for process terminals	CC62

Connection method	
Terminals	
• Terminal type	Push-in terminal
• Conductor cross-section, min.	0.14 mm ²
• Conductor cross-section, max.	2.5 mm ²
• Number of terminals with connection to P1 and P2 bus	17 terminals to P1, 1 terminal to P2

Dimensions	
Width	15 mm
Height	117 mm
Depth	35 mm

Weights	
Weight, approx.	40 g

Classifications			
		Version	Classification
	eClass	14	27-24-26-03
	eClass	12	27-24-26-03
	eClass	9.1	27-24-26-03
	eClass	9	27-24-26-03
	eClass	8	27-24-26-03
	eClass	7.1	27-24-26-03
	eClass	6	27-24-26-03
	ETIM	10	EC001598
	ETIM	9	EC001598
	ETIM	8	EC001598
	ETIM	7	EC001598
	IDEA	4	3560
	UNSPSC	15	32-15-17-04

Approvals / Certificates

General Product Approval



[Manufacturer Declaration](#)



General Product Approval **For use in hazardous locations**



[CCC-Ex](#)

[FM](#)



For use in hazardous locations **Maritime application**



[Miscellaneous](#)

[Type Examination Certificate](#)

[CCC-Ex](#)



Maritime application



[NK / Nippon Kaiji Ky-
okai](#)



[CCS \(China Classifica-
tion Society\)](#)

Maritime application

Environment

[KR \(Korean Register
of Shipping\)](#)



last modified:

2/1/2026

TURLL

YOUR GLOBAL AUTOMATION PARTNER

6ES7193-6UP00-0DP1

OFFICIAL DATASHEET & QUOTATION

- 100% New & Original Factory Sealed
- Global Express Shipping (DHL/FedEx/UPS)
- 12-Month Warranty Protection
- Professional Technical Support

[CHECK STOCK & PRICE](#)



Need Assistance? Scan to Chat on WhatsApp

sales@turl.com | +852 6339 7344